
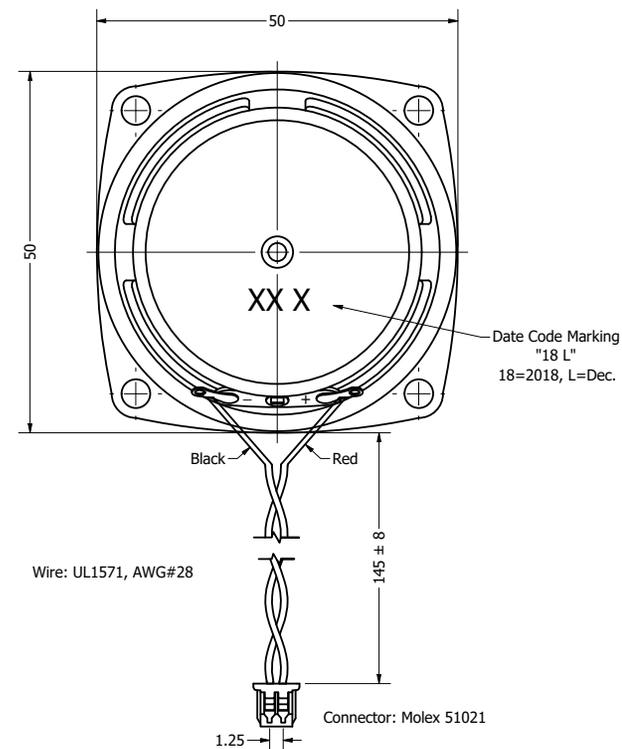
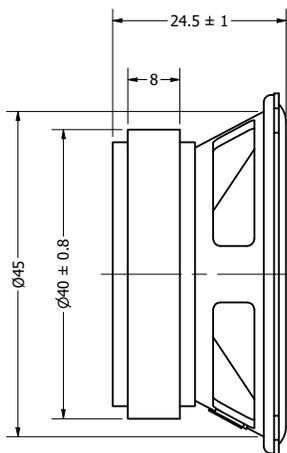


| | | |
|--|-------------------|------------|
| Part Number: | SP500208-3 | |
| | DRAWN | 11/30/2018 |
| Description: | Dynamic Speaker | |
| | CHECKED | 12/11/2018 |
| | C.H. | |
| | APPROVED | 12/11/2018 |
| | C.E. | |
| This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com | | |

Top View

Side View

Bottom View

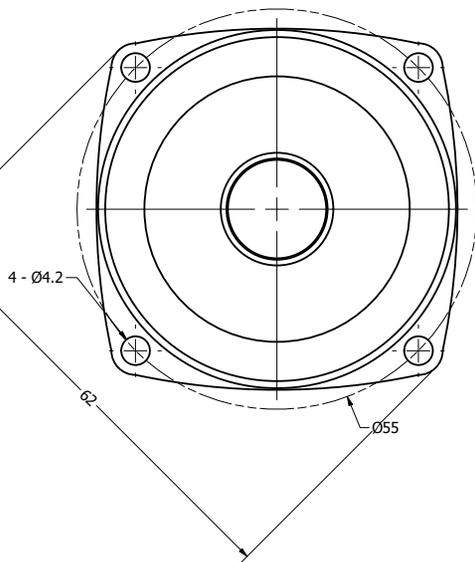

Wire: UL1571, AWG#28

| Items | Specifications | Conditions |
|-----------------------|----------------|-------------|
| Sound Pressure Level | 104 | dB (@ 10cm) |
| Resonant Frequency | 220 | Hz |
| Frequency Range | 220 ~ 10,000 | Hz |
| Nominal Power | 5 | W |
| Max. Power | 7 | W |
| Impedance | 8 | Ω |
| Cone Material | Paper | |
| Mount Type | Frame | |
| Storage Temperature | -25 ~ +55 | °C |
| Operating Temperature | -25 ~ +55 | °C |

REVISION HISTORY

| REV | DESCRIPTION | DATE | APPROVED |
|-----|----------------------------------|------------|----------|
| | Released from Engineering | 12/11/2018 | C.E. |
| 1 | Updated Power / Impedance symbol | 6/8/2019 | C.E. |

NOTES

- 1) All dimensions are in mm unless otherwise noted
- 2) All tolerances are ± 0.5 mm unless otherwise noted
- 3) All parts meet RoHS
- 4) Subject to change or redrawn without notice